


Type AKK

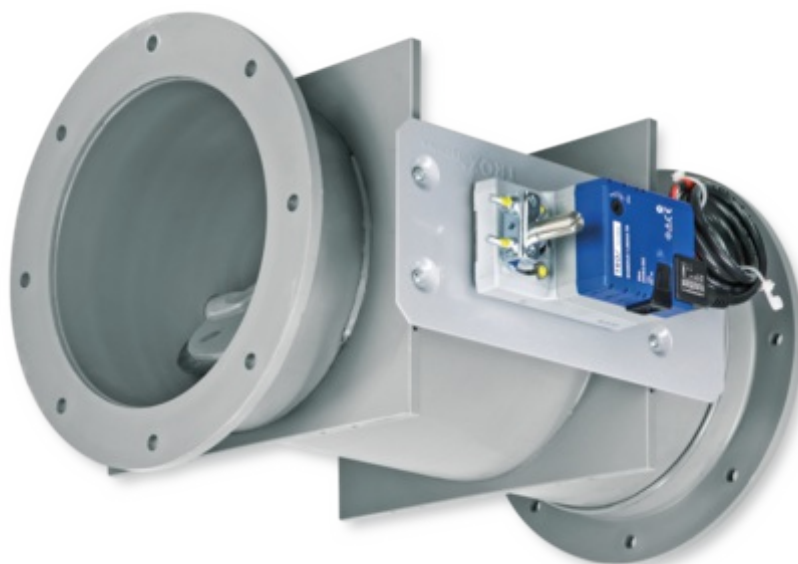


FOR CONTAMINATED AIR

Plastic circular shut-off dampers for shutting off aggressive media volume flows in air conditioning systems

- Maintenance-free damper blade mechanism
- Closed blade air leakage to EN 1751, class 3
- Casing air leakage to EN 1751, class B

Optional equipment and accessories

- Electric actuator
- Spring return actuator
- Pneumatic actuator
- Auxiliary switch with adjustable switching points for capturing the end positions



Application

- Plastic circular shut-off dampers Type AKK for shutting off or restricting the airflow in ventilation ducts of air conditioning systems
- Suitable for contaminated air

Special features

- Damper blade can be actuated manually, electrically or pneumatically
- Low-leakage shut-off
- Safety function provided by optional spring return actuator

Nominal sizes

- 125, 160, 200, 250, 315, 400

Variants

- AKK: Shut-off damper
- AKK-FL: Shut-off damper with flanges on both ends

Parts and characteristics

- Ready-to-install shut-off damper
- Damper blade with blade mechanism

Attachments

- Open/Close actuators: For the opening and closing of shut-off dampers in air conditioning systems
- Auxiliary switch for capturing the end positions

Accessories

- Matching flanges for both ends, including seals

Construction features

- Circular casing
- Spigot suitable for ducts according to DIN 8077
- Position of the damper blade indicated externally at the shaft extension
- All components coming into contact with the airflow are made of plastic (no interior metal parts)

Materials and surfaces

- Casing and damper blade made of flame-resistant polypropylene (PPs)
- Plain bearings made of polypropylene (PP)
- Damper blade seals in chloroprene rubber (CR)

Standards and guidelines

- Hygiene conforms to VDI 6022
- Closed blade air leakage to EN 1751, class 3
- Meets the general requirements of DIN 1946, part 4, with regard to the acceptable closed blade air leakage
- Casing air leakage to EN 1751, class B

Maintenance

- Maintenance-free as construction and materials are not subject to wear

TECHNICAL INFORMATION

Function, Technical data, Quick sizing, Specification text, Order code ^

Variants, Attachments, Dimensions and weight v

Installation details, Basic information and nomenclature v

TROX Italia S.p.A.



Online-Services

- [TROX Academy](#)

- [Your contact partner](#)

- [Online fault report](#)

Service-Hotlines

Telefono
+39 02-98 29 74.1
Telefax
+39 02-98 29 74 60

TROX NEI SOCIAL WEB

Società unipersonale soggetta a
direzione e coordinamento di
TROX GmbH

Sede legale: Via Mecenate 90 - 20138
Milano

Cap. Soc. EUR 2.000.000

R.E.A. n.

659693

Reg.

Impr. MI, C.F. e P.IVA IT 00897380150

Casella di posta certificata: trox@pec.it