



MFI-PLA



MFI-E10-SPC

Mini Pleat filter insert  
type MFI, construction GAL



MFI-H14-SPC

Mini Pleat filter insert  
type MFI, construction SPC



TESTED TO  
VDI 6022

Conforms to VDI 6022



ATEX-ZERTIFIZIERUNG

ATEX construction optional



## MFI

### COMPACT CONSTRUCTION FOR LARGE VOLUME FLOW RATES

Prefilters or final filters for the separation of fine dust and particulate filters for the highest requirements in ventilation and air-conditioning

systems

- Filter groups ISO ePM10, ISO ePM1 (fine dust filter) and EPA, HEPA (particulate filter)
- Performance data tested according to ISO 16890 or to EN 1822-1 and ISO 29463-2 to ISO 29463-5
- Eurovent Certification for fine dust filters
- Meets the hygiene requirements of VDI 6022
- High energy efficiency class according to Eurovent
- Optimised energy efficiency of the PLA-ECO construction in ISO ePM1
- Filter media for special requirements made of glass fibre papers, with spacers made of hot-melt adhesive or textile threads
- Low initial differential pressure due to ideal pleat position and largest possible filter area
- Compact V-design with low installation depths
- Fitting depending on filter class, into standard cell frames for filter walls (type SIF), into mounting frames (type MF), or into universal casings (type UCA) for duct installation

Optional equipment

- ATEX construction for protection zones 1 and 2 as well as 21 and 22

## General information

---



Application

- Mini Pleat filter insert for the separation of fine dust and suspended particles such as aerosols, toxic dusts, viruses and bacteria from the supply and extract air in ventilation and air conditioning systems with large volume flow rates and long filter service lives
- Fine dust filter: Prefilter or final filter for the separation of fine dust in ventilation systems.
- Particulate filter: Main or final filter used for the most critical requirements of air cleanliness and sterility in areas such as industry, research, medicine, pharmaceuticals, and nuclear engineering

Special characteristics

- Optimised energy efficiency of the PLA-ECO construction in ISO ePM1
- Leakage test is standard for all particulate filters of classes H13, H14

Classification

- Eurovent certification for fine dust filters
- Meets the hygiene requirements
- Certificate of conformity for use in areas with a potentially explosive atmosphere

Nominal sizes

- B × H × T [mm]

Filter classes

Filter groups

- ISO ePM10 acc. to ISO 16890
- ISO ePM1 acc. to ISO 16890
- EPA according to EN 1822
- HEPA according to EN 1822

Filter classes

- ePM10 55 %
- ePM1 55 %
- ePM1 60 %
- ePM1 85 %
- E10

- E11
- H13
- H14

#### Options

- Number of filter packs
- FNU: Flat seal on the upstream side
- FND: Flat seal on the downstream side
- OT: Oil mist test (only for filter classes H13, H14)
- OTC: Oil mist test with certificate (only for filter classes H13, H14)

#### Construction

- PLA: Frame made of plastic
- PLA-ECO: plastic frame, optimised energy efficiency
- GAL: Frame made of galvanised steel
- SPC: frame steel galvanised, powder-coated, RAL 9010 (pure white)
- EX: Protection zones 1 and 2 as well as 21 and 22 (only in combination with frame version GAL)

#### Useful additions

- Filter wall (SIF) for fine dust filters
- Mounting frame (MF) for EPA and HEPA filters
- Universal casing (UCA) for fine dust filters

#### Construction features

- Compact V-design
- Fine dust filter (filter groups according to ISO 16890) as standard without seal, optionally with flat seal
- Filter classes E10, E11, H13 and H14 as standard with flat seal
- Filter classes E11, H13 and H14 with protection grid on the downstream side

#### Material and surfaces

- Filter media made of high-quality, wet-strength glass fibre papers, pleated
- Spacers provide a uniform spacing of the pleats
- Joint sealing compound made of permanently elastic two-component polyurethane adhesive
- Frame options: made of plastic, galvanised steel or of galvanised sheet steel, powder-coated RAL 9010, pure white

#### Standards and guidelines

- Test according to ISO 16890; international standard for general ventilation and air conditioning; classification of arrestance efficiency based on the measured fractional arrestance efficiency, which is processed into a reporting system for the fine dust arrestance efficiency (ePM)
- For fine dust filters, the fractional arrestance efficiency of a certain size range is determined by aerosols (DEHS and KCl)
- The filters are classified into filter groups ISO ePM10 and ISO ePM1 depending on the tested values
- Testing of particulate filters according to EN 1822-1 and ISO 29463-2 to ISO 29463-5 (EPA, HEPA and ULPA particulate filters): standards for the testing of filtration performance in the manufacturer's factory, particle counting method using a liquid test aerosol
- Uniform classification of particulate filters according to efficiency, using a test aerosol whose average particle size lies within the minimum efficiency (MPPS)
- Particulate filters are classified according to the values determined for the local filtration efficiency and the overall filtration efficiency as EPA

(filter classes E10, E11, E12), HEPA (filter classes H13, H14) or ULPA (filter classes U15, U16, U17)

- Hygiene conformity: VDI 6022, VDI 3803, DIN 1946 Part 4, ÖNORM H 6020, SWKI VA 104-01 and SWKI 99-3 and EN 16798
- Certificate of conformity for correct use in areas with a potentially explosive atmosphere in accordance with guideline 2014/34/EU and compliance with basic health and safety requirements in accordance with EN 80079-36:2016 and EN 80079-37:2016

## TECHNICAL INFORMATION

Technical data, Specification text, Order code



<b>Fractional efficiency ePM10 [%] to ISO 16890</b>	55	-	-
<b>Fractional efficiency ePM1 [%] to ISO 16890</b>	-	60	85
<b>Initial differential pressure [Pa] at nominal volume flow rate</b>	80	105	130
<b>Final differential pressure [Pa]</b>	450	450	450
<b>Maximum operating temperature [°C]</b>	80	80	80
<b>Maximum relative humidity [%]</b>	100	100	100

<b>Filter class according to EN 1822</b>	E10	E11	H13	H14
<b>Efficiency [%] according to EN 1822</b>	> 85	> 95	> 99.95	> 99.995
<b>Initial differential pressure [Pa] at nominal volume flow rate</b>	160	160	265	300
<b>Final differential pressure [Pa]</b>	450	450	600	600
<b>Maximum operating temperature [°C]</b>	80	80	80	80
<b>Maximum relative humidity [%]</b>	100	100	100	100

#### Specification text

Mini Pleat filter insert type MFI for the separation of fine dust and suspended particles such as aerosols, toxic dusts, viruses and bacteria from the supply and extract air in ventilation systems. Used as fine dust filters, prefilters or final filters in AHU units; or as particulate filters, main or final filters for highest requirements of air purity and sterility, in areas such as industry, research, medicine, pharmaceuticals, and nuclear technology. Low installation depth due to compact V-design, for systems with high volume flow rates and long filter service lives. Filter media made of high-quality, wet-strength glass fibre papers, with spacers. Optimum pleat position and largest possible filter area allow low initial differential pressures. Mini Pleat filter inserts available in market sizes, filter groups ISO ePM10, ISO ePM1 (fine dust filters) and EPA, HEPA (particulate filters). As a fine dust filter (filter groups according to ISO 16890) as standard without seal, optionally available with flat seal, as a particulate filter, Mini Pleat filter inserts are equipped with a flat seal. Filter classes E11, H13 and H14 as standard with protection grid on the downstream side. Mini Pleat filter insert as fine dust filters are certified according to Eurovent. Mini Pleat filter inserts MFI are hygiene-compliant according to VDI 6022.

The filter insert MFI with optional EX protection MFI-EX may be used in areas with a potentially explosive atmosphere of zones 1 and 2 and zones 21 and 22 (EX II 2G Ex h IIC Gb and EX II 2D Ex h IIIB Db).

The filter must be connected to the ground potential. All conductive and dissipative parts must be connected to each other and to earthed. Conductive dusts are excluded from the application. Make sure that no metal particles can get into the filter. Ambient temperature range:  $-40\text{ °C} \leq T_a \leq +80\text{ °C}$ .

#### Special features

- Optimised energy efficiency of the PLA-ECO construction in ISO ePM1
- Leakage test is standard for all particulate filters of classes H13, H14

#### Materials and surfaces

- Filter media made of high-quality, wet-strength glass fibre papers, pleated
- Spacers provide a uniform spacing of the pleats
- Joint sealing compound made of permanently elastic two-component polyurethane adhesive
- Frame options: made of plastic, galvanised steel or of galvanised sheet steel, powder-coated RAL 9010, pure white

#### Construction

- PLA: Frame made of plastic
- PLA-ECO: plastic frame, optimised energy efficiency
- GAL: Frame made of galvanised steel
- SPC: frame steel galvanised, powder-coated, RAL 9010 (pure white)
- EX: Protection zones 1 and 2 as well as 21 and 22 (only in combination with frame version GAL)

#### Sizing data

- Filter group [ISO 16890]
- Separation efficiency [%]
- Filter class [EN 1822]
- Volume flow rate [ $\text{m}^3/\text{h}$ ]
- Initial differential pressure [Pa]
- Nominal size [mm]

#### Life cycle assessment

A life cycle assessment is available for the product series in form of an Environmental Product Declaration (EPD) that has been checked and published by a programme holder.

**MFI** - **H13** - - **GAL** / **592 × 592 × 292** × **8** / **PD** / **FNU** / **OT**  
 | | | | | | | | | |  
**1** **2** **3** **4** **5** **6** **7** **8** **9**

1 Type  
MFI Mini Pleat filter insert

2 Classification  
 ePM1 Fractional efficiency ePM1 acc. to ISO 16890  
 ePM10 Fractional efficiency ePM10 acc. to ISO 16890  
 E10 Filter class E10 according to EN 1822  
 E11 Filter class E11 according to EN 1822  
 H13 Filter class H13 according to EN 1822  
 H14 Filter class H14 according to EN 1822

3 Separation efficiency  
Specify the separation efficiency [%] according to ISO 16890(not for E10, E11, H13, H14)

4 Construction  
 PLA Frame made of plastic  
 PLA-ECO Plastic frame, optimised energy efficiency  
 GAL Frame made of galvanised sheet steel  
 SPC Frame made of galvanised sheet steel, powder-coated RAL9010 (pure white)  
 EX Frame made of galvanised sheet steel, for zones 1 and 2 aswell as 21 and 22 in areas with potentially explosive atmospheres (EX)

5 Nominal size [mm]  
Specify width × height × depth

6 Number of filter packs  
6, 8

7 Protection grid  
 No entry: without protection grid  
 PD Protection grid on the downstream side (E11, H13, H14 only)

8 Seal  
No entry: without seal

FNU Flat seal on the upstream side  
FND Flat seal on the downstream side

9 Testing  
 No entry: no leakage test  
 OT Oil mist test (only H13, H14)  
 OTC Oil mist test with certificate (only H13, H14)

Order example: MFI-H13-GAL/592×592×292×8/PD/FNU/OT

Type	MFI
Classification	Filter class H13 according to EN 1822
Separation efficiency	-
Variant	Frame made of galvanised sheet steel
Nominal size [mm]	Width 592, height 592, depth 292
Number of filter packs	8
Protection grid	Protection grid on the upstream side
Seal	Flat seal on the downstream side
Testing	Oil mist test


MFI-PLA-ECO



MFI-PLA



MFI-E10-GAL

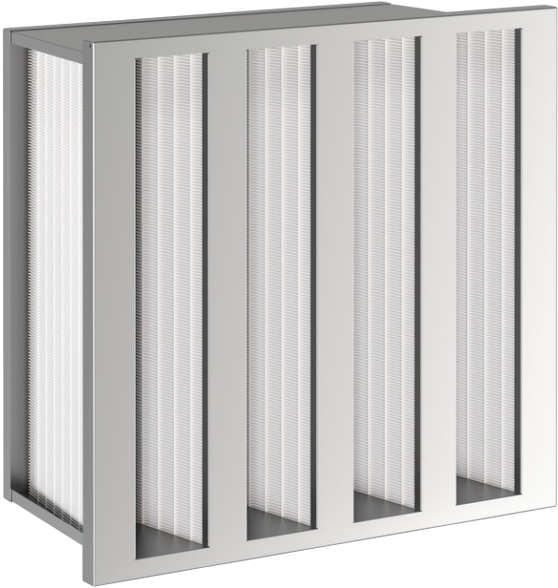

MFI-H14-SPC

