

Adapter frame for connection to ducts



Tested to VDI 6022

## PARTICULATE FILTER AIR TERMINAL DEVICES TFW

FOR CRITICAL AIR CLEANLINESS AND CRITICAL  
HYGIENE REQUIREMENTS, SUITABLE FOR WALL  
INSTALLATION

Wall mounted particulate filters as a final filter stage with Mini Pleat filter panels for the separation of suspended particles. Used in medicine, biology, the pharmaceuticals industry, and sensitive technical areas.

- Easy, time-saving and secure filter change, can be completed by one person due to special press-in frame
- For air cleanliness classes 5 to 8 according to ISO 14644-1
- Different constructions for filter elements with various frame depths
- Casing with indentations to ensure the precise fitting of the filter elements
- Equipment for differential pressure measurement, sealing integrity testing, and particle sampling for measurement
- Meets the hygiene requirements of VDI 6022

### General information



### Application

- Particulate filter air terminal devices for wall installation as a final filter stage and for air distribution
- Fitting of filter elements for the separation of suspended particles such as aerosols, toxic dusts, viruses, bacteria from the supply or extract air.

#### Construction

- SPC: Steel, powder-coated RAL 9010, pure white

#### Nominal sizes

- Casing depth 262, 334, and 476 [mm]

#### Useful additions

- X-GRILLE modular: ventilation grille

#### Useful additions

- Mini Pleat filter panels (MFP)
- Suitable filter elements to be ordered separately

#### Special features

- Compact construction
- Easy connection to ducts
- High operational reliability

#### Construction features

- Clamping mechanism with 2 fixing points for filter elements
- Sealing integrity test facility to check the filter function
- Measurement points for monitoring the differential operating pressure
- Casing with adapter frame facilitates connection to ducts

#### Materials and surfaces

- Casing made of sheet steel, powder-coated RAL 9010, pure white
- Ventilation grille X-GRILLE modular, made of aluminium, powder-coated RAL 9010, pure white
- Ventilation grille X-GRILLE modular, made from extruded aluminium sections, anodised E6-C-0 (no colour)

#### Commissioning

- The filter element is pressed into place using 2 easy-to-handle clamps
- Fastening of the various diffuser faces by concealed screw fixings (by others)

#### Standards and guidelines

- Hygiene conformity according to VDI 6022, VDI 3803, DIN 1946 Part 4, ÖNORM H 6021 and ÖNORM H 6020, SWKI VA 104-01 and SWKI 99-3, and EN 13779
- Leakage class: L1 according to EN 1886 and D according to EN 15727

#### Maintenance

- Air terminal devices with a concealed screw fixing to facilitate removal for filter change and decontamination

## TECHNICAL INFORMATION

This specification text describes the general properties of the product. Texts for variants can be generated with our Easy Product Finder design program.

### Specification text

Particulate filter air terminal device type TFW for wall installation as a final filter stage and for air distribution. Fitting of filter elements for the separation of suspended particles such as aerosols, toxic dusts, viruses and bacteria from the supply or extract air. Casing with clamping mechanism with 2 fixing points for filter elements. As standard, the casings are equipped with a sealing integrity test facility and pressure measurement points for monitoring the operating differential pressure. For the fitting of Mini Pleat filter panels with a flat seal. Ventilation grille XGRILLE modular, made of aluminium, anodised E6-C-0 (no colour) or powder-coated RAL 9010 (pure white). Leakage test for each casing.

### Special features

- Compact construction
- Easy connection to ducts
- High operational reliability

### Materials and surfaces

- Casing made of sheet steel, powder-coated RAL 9010, pure white
- Ventilation grille X-GRILLE modular, made of aluminium, powder-coated RAL 9010, pure white
- Ventilation grille X-GRILLE modular, made from extruded aluminium sections, anodised E6-C-0 (no colour)

### Constructions

- SPC: Steel, powder-coated, RAL 9010, pure white

- 1 Type  
TFW Wall mounted particulate filter
- 2 Casing material  
SPC Steel, powder-coated, RAL 9010 (pure white)
- 3 Air terminal device  
No entry: none  
X-GRILLE modular
- 4 Surface – diffuser face  
No entry: anodised, E6-C-0 (no colour)  
9010 Powder-coated RAL 9010, pure white, GU50
- 5 Nominal size [mm]  
Specify size (width × height)  
  
X-GRILLE modular  
665 × 335
- 6 Casing depth [mm]  
Specify casing depth


Order example: TFW-SPC-XGM-9010/665×335×476

Type	TFW
Material	Steel, powder-coated, RAL 9010 (pure white)
Air terminal device	X-GRILLE modular
Surface – diffuser face	Powder-coated RAL 9010, pure white, GU50
Nominal size [mm]	Width 665, height 335
Casing depth [mm]	476


TFW – SPC – X-GRILLE modular – 9010 / 665 × 335 × 476

1 2 3 4 5 6

Dimensional drawing of TFW

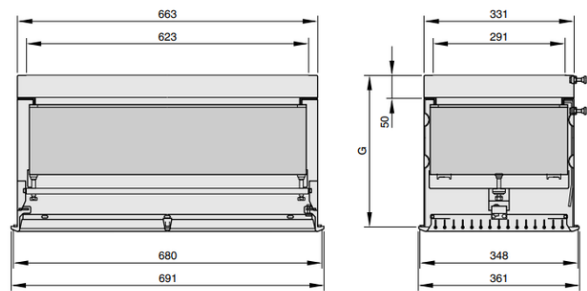

TFW flange dimensions

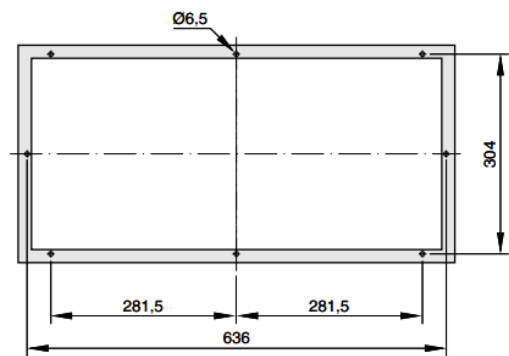

Dimensions [mm] and weight [kg] Wall mounted particulate filter with ventilation grille X-GRILLE modular

Nominal size		Filter size	Casing depth	Weight
L	H	B × H × T	G	kg
665	335	305 × 610 × 78	262	10
665	335	305 × 610 × 150	334	11
665	335	305 × 610 × 292	476	12